


# SPECIFICATION

|               |              |
|---------------|--------------|
| IMAGE FORMAT  | Φ4.8, 1/2.8" |
| FOCAL LENGTH  | 1.4mm        |
| F.O.V.@IMX415 | 200°         |
|               | 200°         |
|               | 121°         |
| RESOLUTION    | 8 MP         |
| DISTORTION    | <-125%       |
| APERTURE      | F2.5         |
| MOUNT         | M12x0.5      |
| IRIS          | Fixed        |
| M.O.D.        | 0.2m         |
| T.T.L.        | 13.36mm      |
| STRUCTURE     | 6G+IRCF      |
| WATERPROOF    | IP69K        |

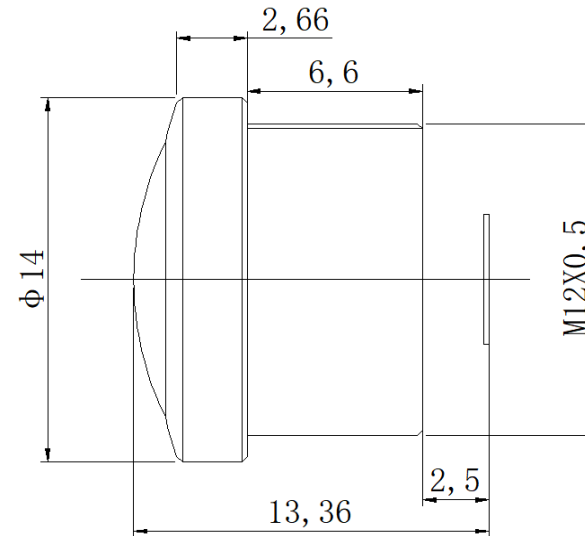

|       |     |         |  |                                                                                                                                              |                    |     |             |      |      |
|-------|-----|---------|--|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------------|------|------|
| SCALE | 2:1 | DRAWN   |  | MODEL                                                                                                                                        | <b>S4820025F69</b> | REV | DESCRIPTION | DATE | NAME |
| DATE  |     | CHECK   |  | <br>香港致远电子集团有限公司<br>HONGKONG TOWIN ELECTRONICS CO.,LTD. |                    | ①   |             |      |      |
| UNIT  | mm  | APPROVE |  |                                                                                                                                              |                    | ②   |             |      |      |
|       |     |         |  |                                                                                                                                              |                    | ③   |             |      |      |